


CERTO® Dichtblindniet

Stahl verzinkt | Stahl verzinkt
 Flachkopf | geschlossen

DIN EN ISO
15976

CAD
 DATEN
 ONLINE

Serie
907

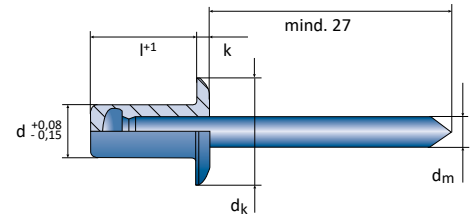

d	l ⁺¹	$\frac{d}{k}$	Nr.	
3,2	6,0	0,5 - 1,5	10.907.032.060	500
	8,0	1,0 - 3,0	10.907.032.080	500
	9,5	2,5 - 5,0	10.907.032.095	500

d_k 6,0^{-0,3} d_m 1,9 k 1,0^{±0,3} 3,3 mm 1150 N 1300 N

4,0	6,0	0,5 - 1,5	10.907.040.060	500
	8,0	1,0 - 3,0	10.907.040.080	500
	9,5	2,5 - 5,0	10.907.040.095	500
	12,0	4,5 - 6,5	10.907.040.120	500
	16,0	6,0 - 10,5	10.907.040.160	500

d_k 8,0^{-0,3} d_m 2,3 k 1,4^{±0,3} 4,1 mm 1730 N 1860 N

d	l ⁺¹	$\frac{d}{k}$	Nr.	
4,8	8,0	0,5 - 3,0	10.907.048.080	500
	9,5	2,5 - 5,0	10.907.048.095	500
	12,0	4,5 - 6,5	10.907.048.120	500
	16,0	6,0 - 10,5	10.907.048.160	500

d_k 9,5^{-0,3} d_m 2,9 k 1,7^{±0,3} 4,9 mm 2400 N 2800 N