

ALFO® Standard-Blindniet



▮ Kupfer Bronze
Flachkopf | offen



entsprechend
DIN EN ISO
16582

CAD
DATEN
ONLINE

Serie
709

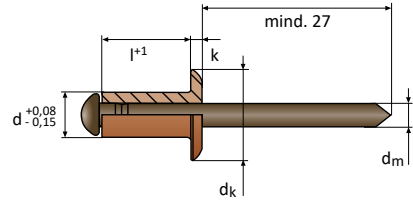

[2.0040]

d	l ⁺¹	$\frac{k}{d}$	Nr.	
3,0	5,0	0,5 - 2,5	10.709.030.050	500
	6,0	2,0 - 3,0	10.709.030.060	500
	8,0	3,0 - 5,0	10.709.030.080	500
	10,0	5,0 - 7,0	10.709.030.100	500

dk 6,3 -0,7 **dm** 1,7 **k** 0,8 ±0,2 3,1 mm 760 N 950 N

3,2	5,0	0,5 - 2,5	10.709.032.050	500
	6,0	1,5 - 3,5	10.709.032.060	500
	8,0	3,0 - 5,5	10.709.032.080	500
	10,0	5,0 - 7,0	10.709.032.100	500

dk 6,4 -0,5 **dm** 1,9 **k** 0,8 ±0,2 3,3 mm 800 N 1000 N

d	l ⁺¹	$\frac{k}{d}$	Nr.	
4,0	6,0	2,0 - 3,5	10.709.040.060	500
	8,0	3,0 - 5,0	10.709.040.080	500
	10,0	5,0 - 7,0	10.709.040.100	500
	12,0	6,5 - 8,5	10.709.040.120	500
	16,0	8,0 - 11,5	10.709.040.160	500

dk 8,0 -1,0 **dm** 2,0 **k** 1,0 ±0,3 4,1 mm 1500 N 1800 N