



Through Standoff open V-SO4

Stainless steel 400 series

CAD
DATA
ONLINE

Series
487

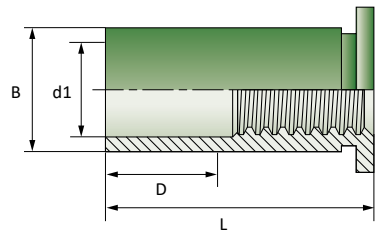

Through standoffs made of stainless steel (AISI 400 series), suitable for use in metal sheets with hardness **above HRB 80 (up to 88)**.

M	min.	L	D	d1	B	H	Mindest- abstand Lochmitte/ Blechrand	Nr.
M3	1,02	3,00	0,00	3,20	4,20	4,80	4,22	6,00
		4,00						
		6,00						
		8,00						
		10,00	4,00					
		12,00						
		14,00	8,00					
		16,00						
		18,00						
		18,00						
3,5 M3	1,02	3,00	0,00	3,20	5,39	6,40	5,41	7,10
		4,00						
		6,00						
		8,00						
		10,00	4,00					
		12,00						
		14,00	8,00					
		16,00						
		18,00						
		18,00						

M	min.	L	D	d1	B	H	Mindest- abstand Lochmitte/ Blechrand	Nr.
M4	1,27	4,00	0,00	4,80	7,12	7,90	7,14	8,40
		6,00						
		8,00						
		10,00	4,00					
		12,00						
		14,00	8,00					
		16,00						
		18,00						
		20,00						
		M5	1,27					
25,00								
25,00								
4,00	0,00							
6,00								
8,00	4,00							
10,00								
12,00								
14,00								
16,00	8,00							
18,00								
20,00								
22,00								
25,00	11,00							
25,00								

i Standoffs with 3.5 M3 threads offer a greater wall thickness for thread size M3.

Item description / Item number		tested in stainless steel		
		Installation (kN)	Pushout (N)	Torque-out (Nm)
M3	10.487.030.003 / 004 / 006 / 008 / 010 / 012 / 014 / 016 / 018	24,5	1493	2,36
M3,5	10.487.035.003 / 004 / 006 / 008 / 010 / 012 / 014 / 016 / 018	42,3	2877	2,36
M4	10.487.040.004 / 006 / 008 / 010 / 012 / 014 / 016 / 018 / 020 / 022 / 025	46,7	4003	6,34
M5	10.487.050.004 / 006 / 008 / 010 / 012 / 014 / 016 / 018 / 020 / 022 / 025	46,7	4003	8,89