
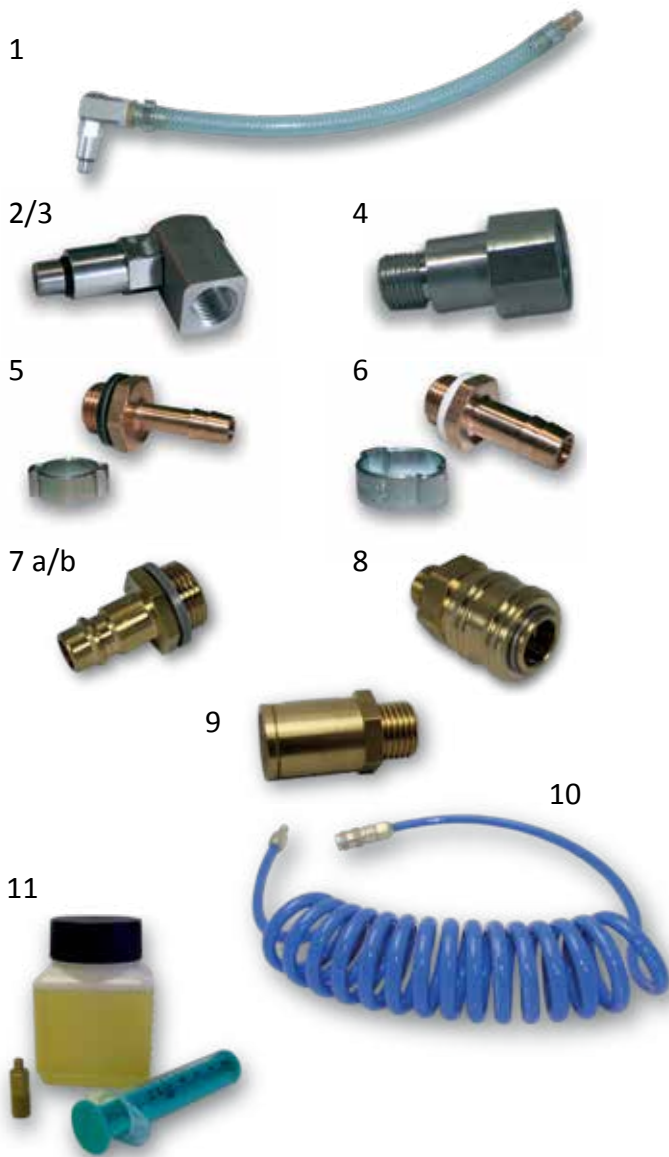


# Pneumatic accessories for BZ and VNG tools

## Add to your order!

Have you considered the required pneumatic accessories? Save unnecessary expenditure and order the suitable accessories for the pneumatic tools of the BZ and VNG series with your tool purchase order!



No.	Description	Item no.
1	Angular pivoting fitting aluminium incl. hose with 1/4" outside thread and hose coupling	321.121.000.053-3-1
2	Pivoting threaded pipe angle, aluminium	321.121.000.053-1-1
3	Pivoting threaded pipe angle, stainless steel	321.121.000.053-2-1
4	Valve extension R1/8"	321.121.000.052
5	Screw-in hose connector -set- G 1/4" 6 mm	321.121.000.057
6	Screw-in hose connector -set- G 1/4" 9 mm	321.121.000.058
7a	Plug connection 7mm G 3/8 for compressed-air service unit	320.848.000.009
7b	Plug connection 7mm G 1/4 for pivoting threaded pipe angle	320.848.000.012
8	Coupling G 1/4"	320.848.000.010
9	Pressure controller 7 bar	320.848.000.004
10A	Compressed air spiral hose incl. coupling and plug connection -length 4m-	320.848.000.005
10B	Compressed air spiral hose incl. coupling and plug connection -length 6m-	320.848.000.006
10C	Compressed air spiral hose incl. coupling and plug connection -length 8m-	320.848.000.008
11	Oil re-fill unit for all tools of BZ- and VNG-series	321.101.006.467
12	Filter regulator G3/8 complete	320.848.000.001
13	Maintenance unit, 2-part, complete	320.848.000.002
---	Replacement filter for filter regulator	320.848.000.003
---	1 litre of pneumatic motor oil	320.848.000.011

For smooth operation of our pneumatic tools please note implicitly the information in our operating manuals! Important for preserving performance and to avoid damages are the **characteristics of the used compressed air**. Water condensation compromises the lubrication and causes corrosion inside the tool! The motors need to be greased continuously! **We recommend implicitly the use of maintenance units** for clean and greased air (VNG) or **filter-pressure reducers** for clean and dry air (BZ)!



Filter regulator G3/8 with filter-pressure regulator, manometer, plastic protective cage, fastening angle, plug connection G3/8 and coupling.



Maintenance unit G3/8, 2-part, including plastic protective cage, fastening angle, plug connection G3/8, coupling and 1 litre of pneumatic motor oil.